




DOT-FREE IP67

FEATURES

- Premium DOT-FREE continuous LED strip with most chip/m quantity available giving brightest and most uniform effect.
- Extremely flexible, highly reliable and durable.
- Custom / 5m / 10m lengths
- Simple installation.
- High lumen output with IP67 protection.
- 5 year warranty.

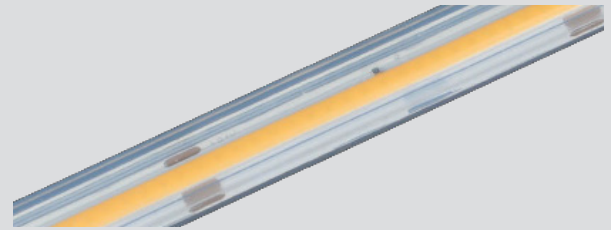

SPECIFICATION

Basic Parameters

Size	IP67: 10mm x 4.8mm x 10000mm or custom
Input Voltage	24VDC
Input Current	0.42A/1m and 1.8A/5m
Typical power	10W/1m and 43.2W/5m
Max power	11.2W
Lifetime	L90 >36,000 hours
LED/m	
Continuous max run	10M
Colour / CCT	2700K,3000K,4000K,6500K,R,G,B
Bin/Step (SDCM)	1 bin 2-step MacAdam ellipse
IP Rating	67
CRI	>90
Energy Efficiency Class	A+
Warranty	5 years
Control	Phase cut (leading & trailing)/0-10V/1-10V/DMX/DALI
Cutting Increment	29.41mm
Beam Angle	60°, 90°, 170° Beam


Product Ordering

CODE	COLOUR	LM/M	STOCKED
DFR-24-10-2700-67	2700K	820	YES
DFR-24-10-3000-67	3000K	900	YES
DFR-24-10-4000-67	4000K	980	YES
DFR-24-10-6000-67	6500K	1000	YES
DFR-24-10-R-67	Red	620-630nm	S/O
DFR-24-10-G-67	Blue	520-530nm	S/O
DFR-24-10-B-67	Green	450-460nm	S/O

S/O: Special Order

Standard length supplied with single end 2000mm IP67 cable

Technical Diagram

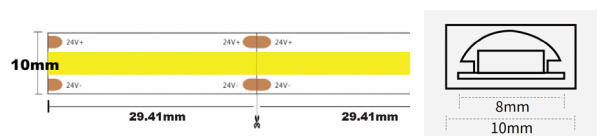

Ingress Protection (IP)



ET IP67

10mmx4.8mmx10000

Recommended Solution / Accessories

TRANSFORMERS

GSTRAN-60-24-C
Non-dimmable ≤5m



PDV-75-24
dimmmable ≤5m




PDV-150-24
dimmmable ≤10m




PROFILES


1613-F-D
2500mm, W/B/A



2513-F-D
2500mm, W/B/A



1616-F-D
2500mm, W/B/A



DFR-PVC-1M
1000mm Clear PVC

