




696 RGBWW

FEATURES

- Super high-density high-output LED RGB strip.
- Custom lengths and 5m coils.
- Compatible with wide range of RGB controllers.
- Suitable for bars, feature backlighting, gyms and wellness centres, signage, retail and modern residential.

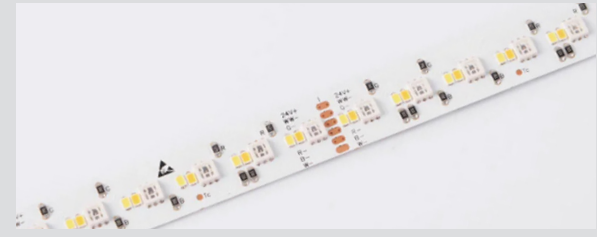

SPECIFICATION


Basic Parameters

Size	IP20: 12mm x 2.1mm x 5000
Input Voltage	24VDC
Input Current	0.73A(1m) 3.2A(5m)
Typical power	17.5W(1m) 76.8W(5m)
Max Power	19.2W(1m)
Lifetime	L90 >36,000 hours
Chips/m	
Continuous max run	5000mm
Colour / CCT	2700K,6000K,R,G,B,RGB5WW
Bin/Step (SDCM)	.8W(5m)
CRI	.8W(5m)
Energy Efficiency Class	
Warranty	3 years (when used indoor)
Control	
Cutting Increment	18leds/62.5mm
Connection Tails	
Beam Angle	


Product Ordering

CODE	COLOUR	LM/M	IP RATING	STOCKED
696-24-12-RGBWW-20	RGBWW	1130	20	YES

Technical Diagram

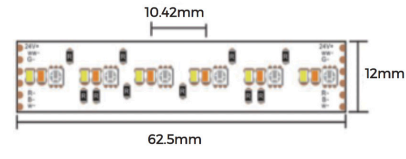

Ingress Protection (IP)



Recommended Solution / Accessories

TRANSFORMERS	PROFILES	
HLG-150-24 Non-dimmable ≥ 7m	1607-F-D 2500mm, W/B/A	
HLG-240-24 Non-dimmable ≥ 12m	2507-F-D 2500mm, W/B/A	
HLG-320-24 Non-dimmable ≥ 16m	1613-F-D 2500mm, W/B/A	
CONTROLLER		
843059 Single zone controller set	2513-F-D 2500mm, W/B/A	
4Z-RGBW-RF Multi zone control panel		
RF-0365 Receiver for 4Z-RGBW-RF		