


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: FW26212424400015	TYPE: FW26212424400015	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.026*1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 78.32 lm/W
MODEL	FW26212424400015	I _{max} (cd)	11608	S/MH (C0/180)	0.32	
NOMINAL POWER(W)	24	LOR (%)	100.0	S/MH (C90/270)	0.14	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	1973.0	□ UP,DN (C0-180)	0.6,67.0	
NOMINAL FLUX(lm)	1972.98	CIE CLASS	DIRECT	□ UP,DN (C180-360)	0.8,31.6	
LAMPS INSIDE	1	□ up (%)	1.4	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	24	□ down (%)	98.6	CIBSE SHR MAX	0.30	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

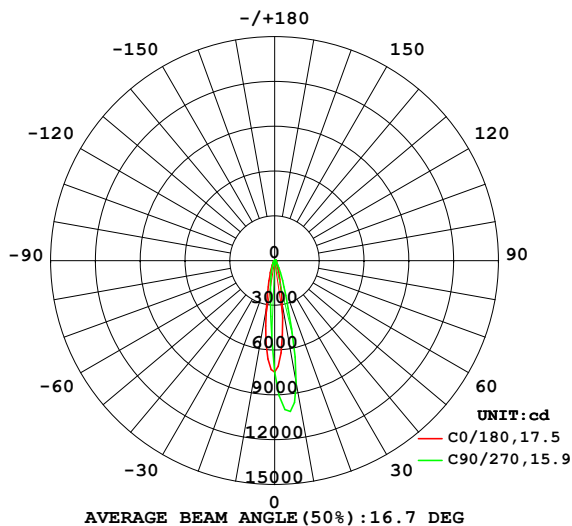

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

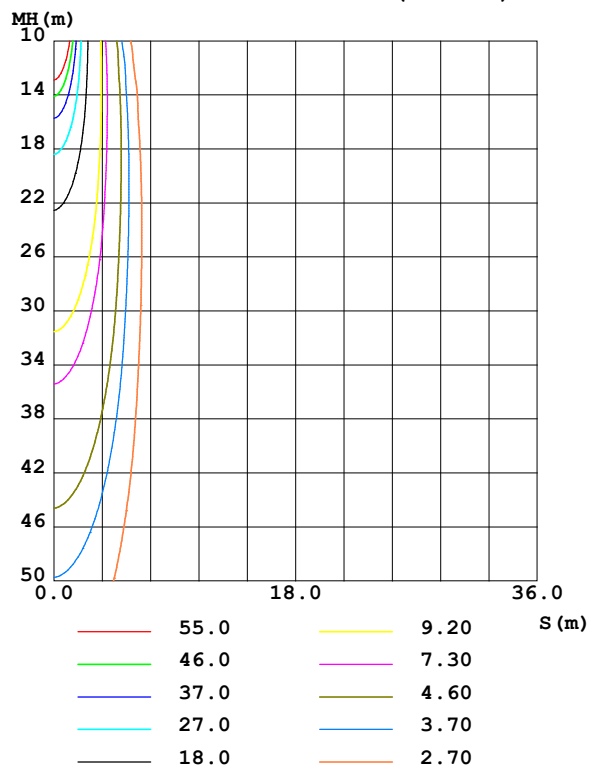

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-11-16

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	289.2	528.1	838.3	873.9	331.6	201.3	165.6	189.5	0- 10	542.4	542.4	27.5,27.5
20	82.17	122.4	187.5	231.5	88.44	60.94	52.54	67.96	10- 20	620.7	1163	58.9,58.9
30	33.43	42.44	56.76	72.25	32.01	26.52	24.51	36.01	20- 30	310.4	1473	74.7,74.7
40	17.61	21.58	25.70	34.21	16.24	14.23	13.34	20.04	30- 40	179.5	1653	83.8,83.8
50	10.57	12.57	13.58	19.51	9.552	8.349	7.742	12.29	40- 50	121.0	1774	89.9,89.9
60	6.826	7.824	7.706	12.13	6.109	5.007	4.091	7.341	50- 60	84.03	1858	94.2,94.2
70	4.014	4.538	4.359	7.209	3.545	2.412	1.516	3.257	60- 70	54.63	1913	96.9,96.9
80	1.512	1.840	1.804	3.200	1.308	0.3366	0.0735	0.2385	70- 80	26.92	1940	98.3,98.3
90	0.0929	0.1007	0.1569	0.2419	0.0480	0.0252	0.0173	0.0482	80- 90	6.257	1946	98.6,98.6
100	0.0346	0.0328	0.0200	0.0438	0.0328	0.0411	0.0357	0.0763	90-100	0.5494	1946	98.7,98.7
110	0.0629	0.0558	0.0401	0.0787	0.0612	0.0684	0.0660	0.1191	100-110	0.6053	1947	98.7,98.7
120	0.1031	0.0902	0.0755	0.1287	0.1001	0.1095	0.1157	0.1872	110-120	0.9168	1948	98.7,98.7
130	0.1741	0.1472	0.1319	0.2074	0.1631	0.1846	0.2149	0.3206	120-130	1.346	1949	98.8,98.8
140	0.3421	0.2707	0.2446	0.3698	0.2980	0.3668	0.4820	0.6835	130-140	2.113	1951	98.9,98.9
150	0.7699	0.6128	0.5397	0.7719	0.6289	0.8159	1.205	1.591	140-150	3.661	1955	99.1,99.1
160	1.763	1.523	1.399	1.779	1.413	1.784	2.707	3.344	150-160	6.118	1961	99.4,99.4
170	3.469	3.266	3.213	3.797	2.989	3.240	4.430	5.436	160-170	7.726	1969	99.8,99.8
180	4.626	4.680	5.099	6.053	4.672	4.714	5.139	6.090	170-180	4.136	1973	100,100
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

Conical surface Flux(90deg): 1730.8 lm

%lum = 87.7%

%lamp = 87.7%

Conical surface Flux(120deg): 1858 lm

%lum = 94.2%


%lamp = 94.2%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-11-16

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: FW26212424400015	TYPE: FW26212424400015	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.026*1	Shielding Angle:

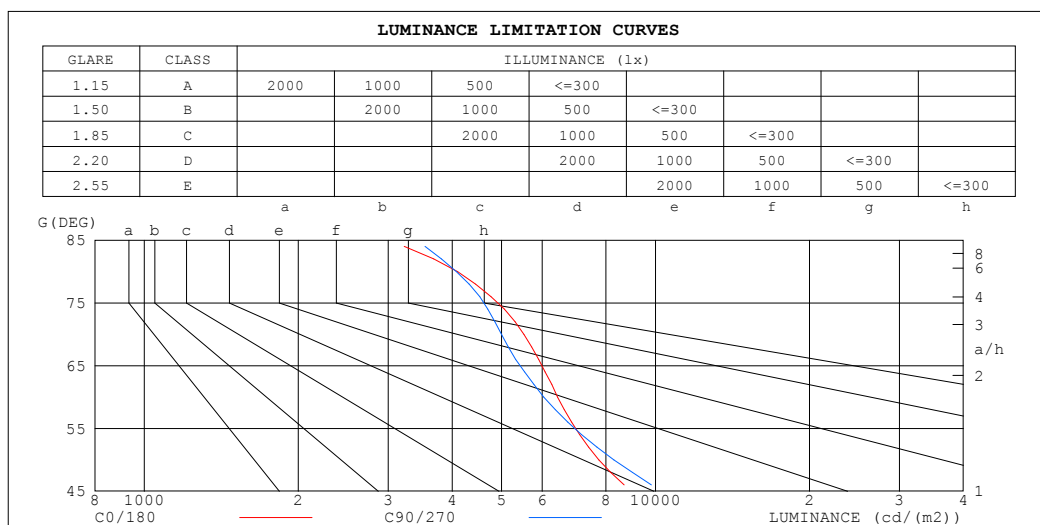

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	3866	4244
80	4101	4075
75	5391	5005
70	5527	5001
65	6308	5752
60	6429	6046
55	7276	7342
50	7747	8289
45	9431	10908


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-11-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: FW26212424400015	TYPE: FW26212424400015	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.026*1	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

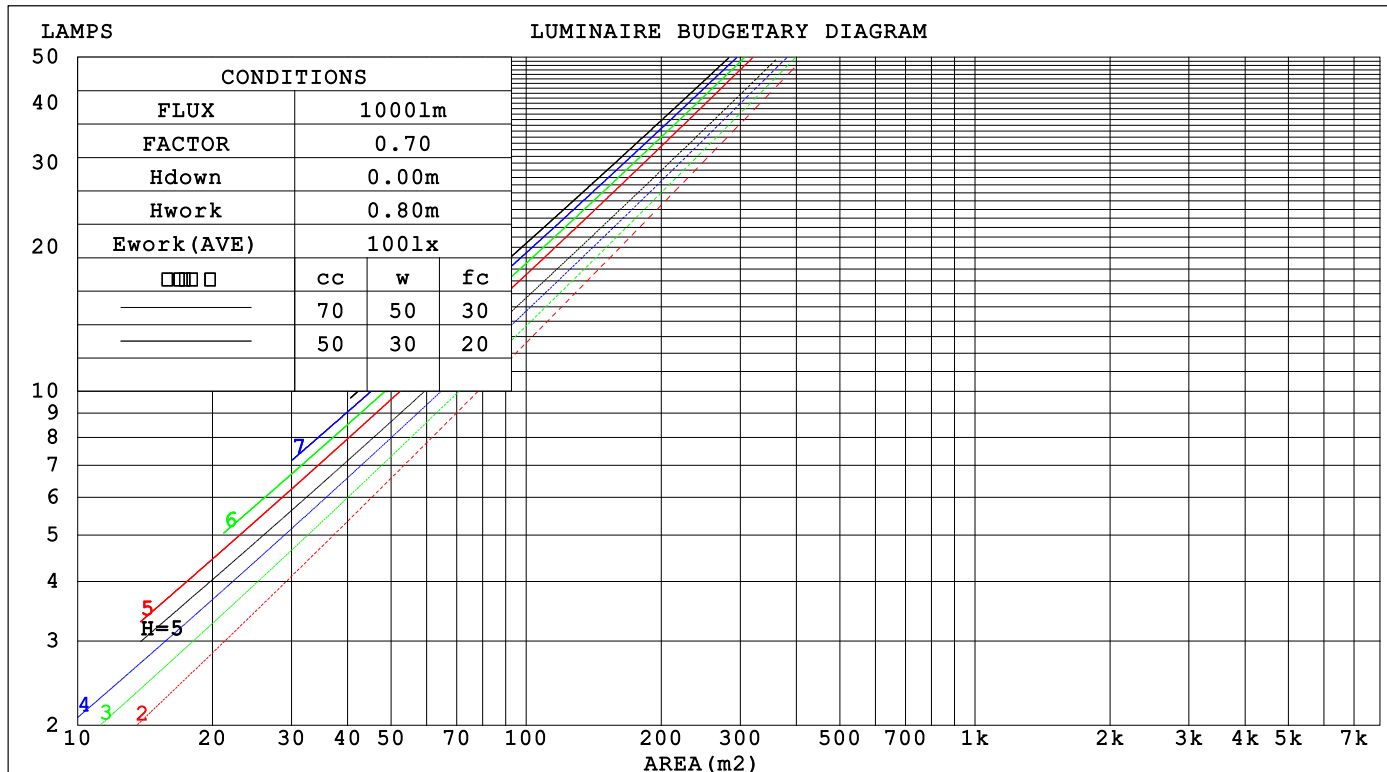

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-11-16

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: FW26212424400015	TYPE: FW26212424400015	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.026*1	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Wall Exitance Coefficients(WEC)
0.0						
1.0	.179 .102 .032	.172 .098 .031	.158 .091 .029	.146 .084 .027	.135 .078 .025	
2.0	.168 .092 .028	.162 .089 .028	.151 .084 .026	.140 .079 .025	.131 .074 .023	
3.0	.157 .084 .025	.152 .081 .025	.142 .077 .023	.133 .073 .022	.125 .069 .021	
4.0	.147 .076 .022	.142 .075 .022	.134 .071 .021	.126 .068 .020	.119 .065 .020	
5.0	.138 .070 .020	.134 .069 .020	.127 .066 .019	.120 .063 .019	.114 .061 .018	
6.0	.129 .065 .019	.126 .064 .018	.120 .061 .018	.114 .059 .017	.108 .057 .017	
7.0	.122 .060 .017	.119 .059 .017	.114 .057 .017	.108 .056 .016	.103 .054 .016	
8.0	.116 .056 .016	.113 .056 .016	.108 .054 .015	.103 .052 .015	.099 .051 .015	
9.0	.110 .053 .015	.107 .052 .015	.103 .051 .014	.099 .049 .014	.095 .048 .014	
10.0	.104 .050 .014	.102 .049 .014	.098 .048 .014	.094 .047 .013	.091 .046 .013	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Ceiling Cavity Exitance Coefficients(CCEC)
0.0	.201 .201 .201	.172 .172 .172	.117 .117 .117	.067 .067 .067	.022 .022 .022	
1.0	.182 .168 .155	.156 .144 .134	.106 .099 .092	.061 .057 .054	.020 .018 .017	
2.0	.166 .143 .124	.143 .123 .107	.098 .085 .075	.056 .050 .044	.018 .016 .014	
3.0	.153 .124 .101	.132 .107 .088	.090 .074 .061	.052 .043 .036	.017 .014 .012	
4.0	.142 .109 .084	.122 .095 .073	.084 .066 .052	.049 .039 .031	.016 .013 .010	
5.0	.133 .098 .072	.114 .085 .062	.079 .059 .044	.046 .035 .026	.015 .011 .009	
6.0	.125 .088 .062	.107 .076 .054	.074 .053 .038	.043 .031 .023	.014 .010 .008	
7.0	.117 .080 .055	.101 .070 .048	.070 .049 .034	.041 .029 .020	.013 .009 .007	
8.0	.111 .074 .049	.095 .064 .042	.066 .045 .030	.038 .027 .018	.012 .009 .006	
9.0	.105 .068 .044	.091 .059 .038	.063 .042 .027	.037 .025 .016	.012 .008 .005	
10.0	.100 .064 .040	.086 .055 .035	.060 .039 .025	.035 .023 .015	.011 .008 .005	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-11-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: FW26212424400015					TYPE: FW26212424400015			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.026*1			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		14.1	15.0	14.4	15.2	15.3	14.1	14.9	14.3	15.1	15.3
3H		15.2	16.0	15.5	16.2	16.5	14.9	15.7	15.2	15.9	16.1
4H		15.7	16.4	16.0	16.7	16.9	15.3	16.0	15.6	16.3	16.5
6H		15.9	16.7	16.3	16.9	17.2	15.5	16.2	15.8	16.5	16.8
8H		16.0	16.7	16.3	17.0	17.3	15.6	16.3	15.9	16.6	16.9
12H		16.0	16.7	16.4	17.0	17.3	15.6	16.3	16.0	16.6	16.9
4H 2H		14.6	15.3	14.9	15.6	15.8	14.5	15.3	14.8	15.5	15.8
3H		15.9	16.6	16.3	16.9	17.2	15.6	16.2	15.9	16.5	16.8
4H		16.5	17.1	16.9	17.4	17.8	16.0	16.7	16.4	17.0	17.3
6H		16.9	17.4	17.3	17.8	18.2	16.4	16.9	16.8	17.3	17.7
8H		17.0	17.5	17.4	17.9	18.3	16.5	17.0	16.9	17.4	17.8
12H		17.0	17.5	17.5	17.9	18.3	16.6	17.0	17.0	17.4	17.8
8H 4H		16.7	17.2	17.1	17.6	18.0	16.3	16.8	16.7	17.2	17.6
6H		17.2	17.6	17.7	18.1	18.5	16.7	17.2	17.2	17.6	18.0
8H		17.4	17.8	17.9	18.2	18.7	16.9	17.3	17.4	17.7	18.2
12H		17.5	17.8	18.0	18.3	18.8	17.0	17.3	17.5	17.8	18.3
12H 4H		16.7	17.1	17.1	17.5	18.0	16.3	16.7	16.7	17.1	17.6
6H		17.2	17.6	17.7	18.1	18.5	16.8	17.1	17.2	17.6	18.1
8H		17.4	17.8	17.9	18.2	18.7	17.0	17.3	17.4	17.7	18.2
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.3 / - 0.4					+ 0.4 / - 0.5				
1.5H		+ 0.2 / - 0.5					+ 0.5 / - 0.4				
2.0H		+ 0.3 / - 0.7					+ 0.7 / - 0.6				

CIE Pub.117, 1973 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 2.4)
Area: 0.026 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-11-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: FW26212424400015	TYPE: FW26212424400015	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.026*1	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	82	74	70	81	74	70	80	74	70	65
0.80	89	82	78	89	82	78	87	81	77	73
1.00	95	88	84	94	87	83	92	87	83	78
1.25	99	93	89	98	92	88	96	91	87	83
1.50	102	97	93	101	96	92	98	94	91	86
2.00	106	101	97	104	100	96	101	97	94	88
2.50	108	103	100	106	102	99	103	99	97	90
3.00	110	106	102	108	104	101	104	101	99	92
4.00	112	109	106	110	107	105	106	104	102	94
5.00	114	111	109	111	109	107	107	105	104	95
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-11-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: FW26212424400015	TYPE: FW26212424400015	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.026*1	Shielding Angle:

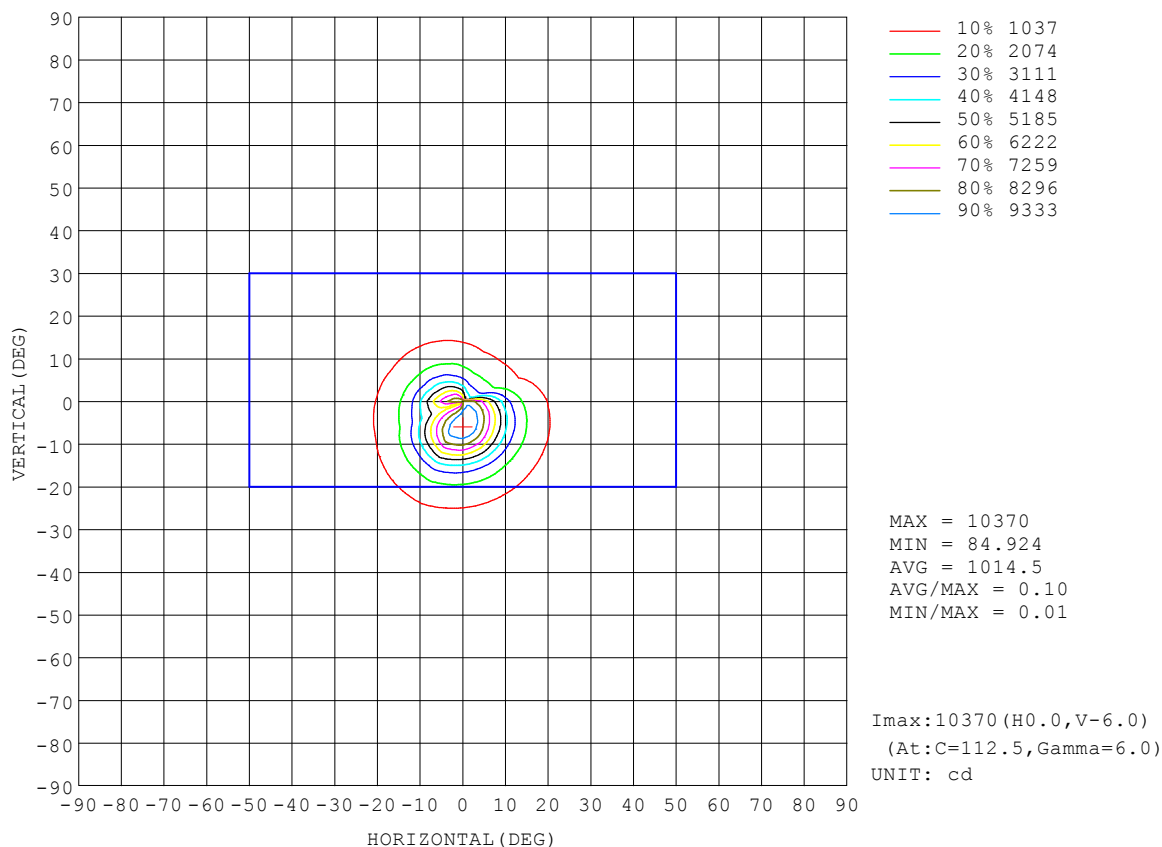


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-11-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

AAI Figure

NAME: FW26212424400015	TYPE: FW26212424400015	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.026*1	Shielding Angle:

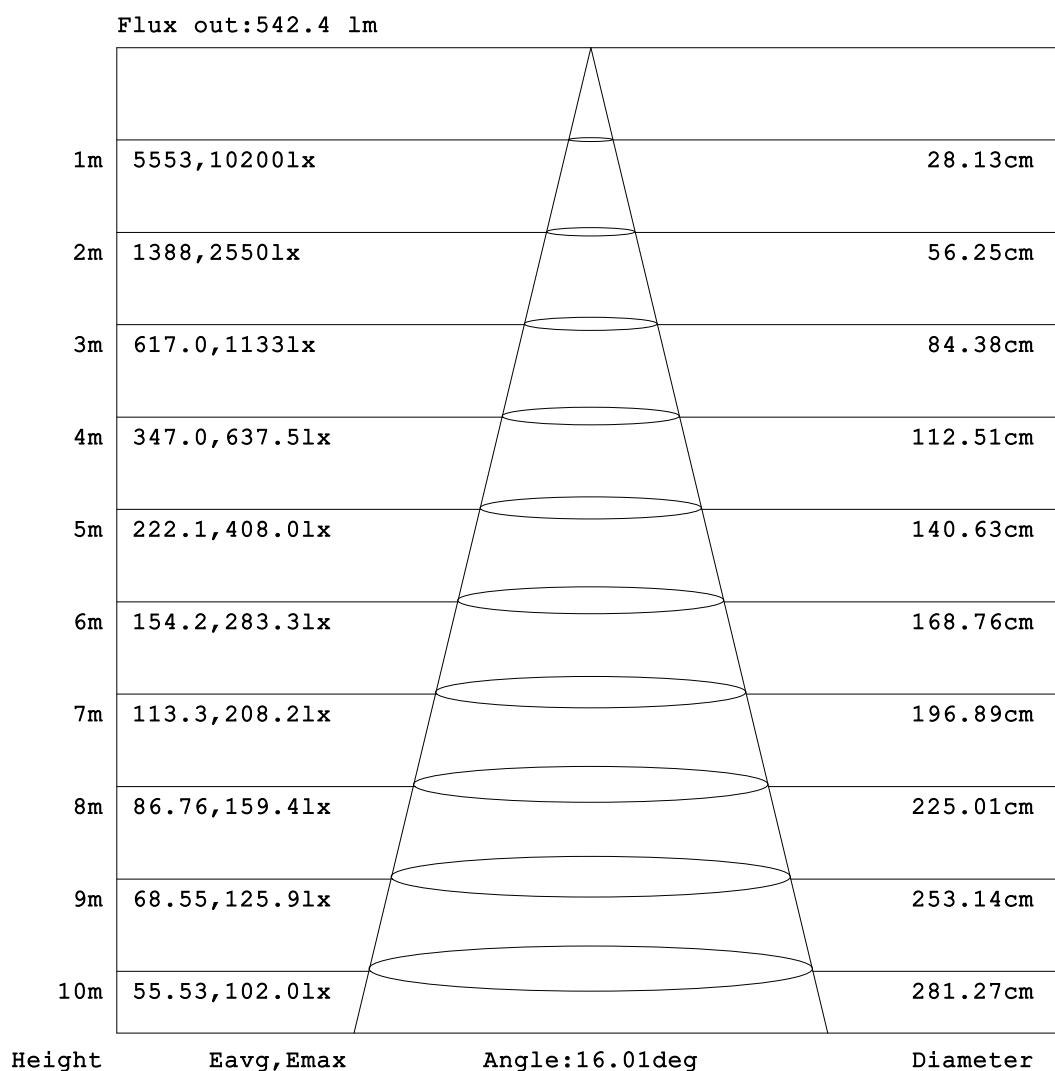


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-11-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

NAME: FW26212424400015	TYPE: FW26212424400015	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.026*1	Shielding Angle:

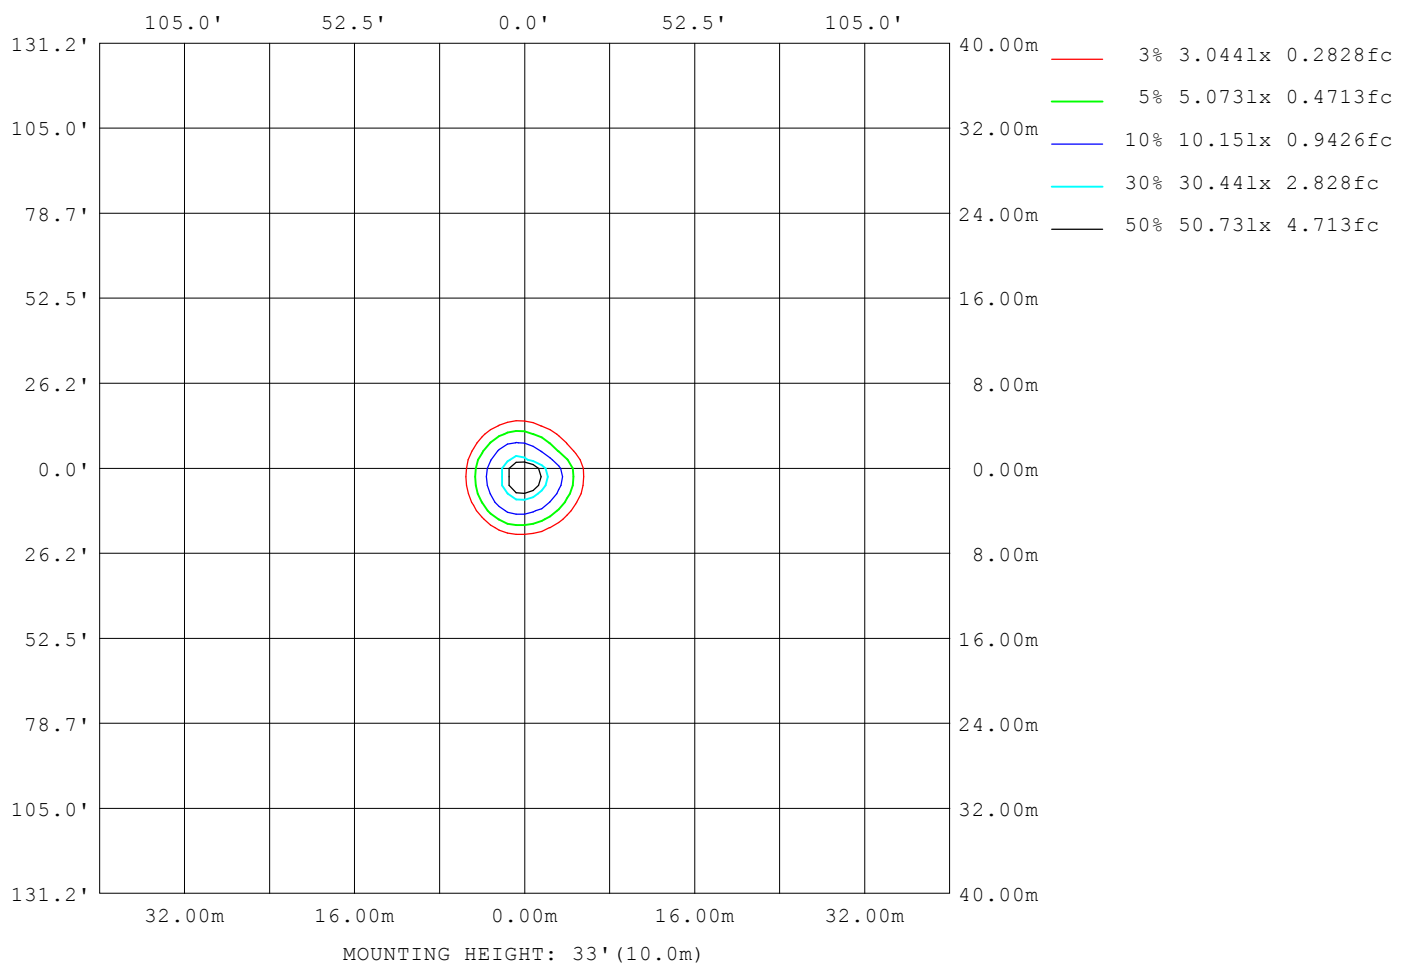

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-11-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: FW26212424400015	TYPE: FW26212424400015	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.026*1	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	4621
L_0~180 (75) av	3769
L_0~180 (85) av	2242
L_90~270 (65) av	3892
L_90~270 (75) av	2667
L_90~270 (85) av	1706
L_45 (65) av	5576
L_45 (75) av	4096
L_45 (85) av	2421

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-11-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

Planar Illuminance Curve

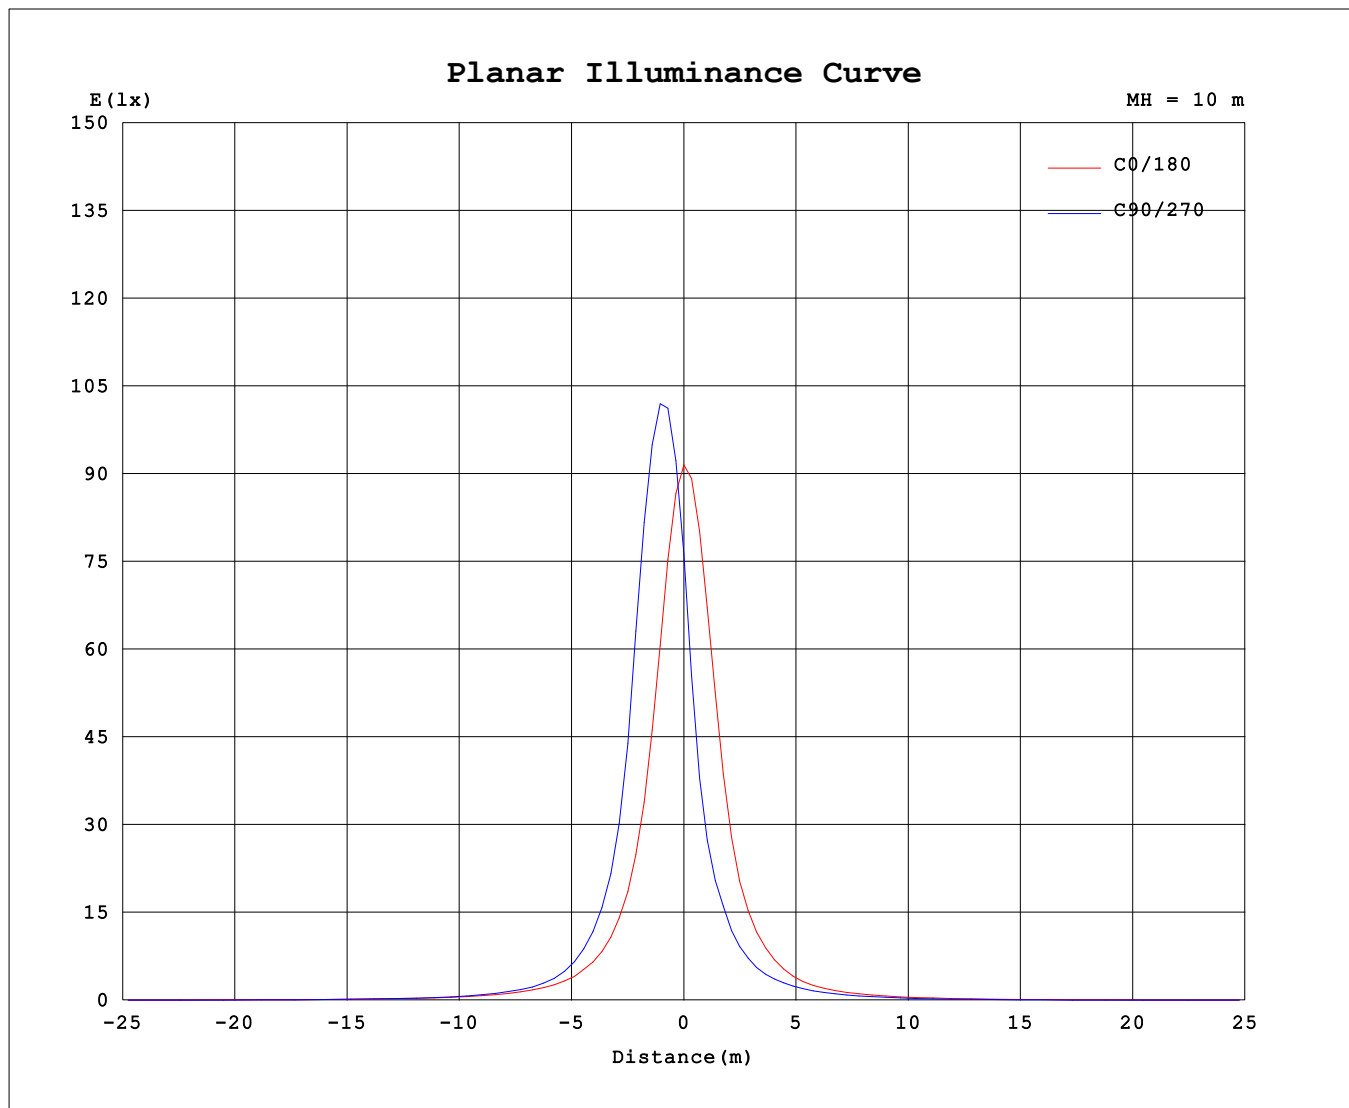

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-11-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: FW26212424400015	TYPE: FW26212424400015	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.026*1	Shielding Angle:

Table--1

UNIT: X10cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	748	748	748	748	748	748	748	748	748	748	748	748	748	748	748	748			
5	620	725	812	911	999	1102	1042	901	660	572	496	417	375	373	411	490			
10	289	410	528	689	838	1014	874	654	332	250	201	172	166	165	190	245			
15	166	232	296	383	470	633	540	397	182	143	121	106	99.2	105	121	159			
20	82.2	105	122	158	187	249	232	197	88.4	70.7	60.9	54.6	52.5	57.8	68.0	89.9			
25	56.4	67.0	76.2	92.3	113	150	144	128	57.2	46.8	41.2	38.3	38.1	43.4	51.6	67.0			
30	33.4	38.8	42.4	48.9	56.8	73.4	72.2	68.6	32.0	28.6	26.5	24.4	24.5	28.4	36.0	47.3			
35	25.3	29.0	31.5	34.9	39.5	49.7	50.5	49.6	23.8	22.3	20.6	18.6	19.0	22.1	28.2	38.1			
40	17.6	20.0	21.6	23.1	25.7	32.2	34.2	33.8	16.2	15.7	14.2	13.1	13.3	15.7	20.0	27.7			
45	14.2	16.1	17.2	18.0	19.7	25.0	27.1	27.0	12.9	12.6	11.3	10.5	10.6	12.7	16.4	22.9			
50	10.6	12.0	12.6	12.8	13.6	17.5	19.5	20.0	9.55	9.42	8.35	7.62	7.74	9.31	12.29	17.5			
55	8.86	10.0	10.4	10.2	10.7	14.0	16.0	16.8	7.96	7.82	6.87	6.23	6.16	7.59	10.12	14.67			
60	6.83	7.68	7.82	7.40	7.71	10.15	12.13	12.94	6.11	5.88	5.01	4.37	4.09	5.16	7.34	11.05			
65	5.66	6.40	6.42	5.99	6.20	8.22	10.05	10.83	5.03	4.75	3.91	3.24	2.96	3.72	5.64	8.84			
70	4.01	4.68	4.54	4.19	4.36	5.85	7.21	7.96	3.55	3.10	2.41	1.75	1.52	1.88	3.26	5.70			
75	2.96	3.56	3.43	3.13	3.30	4.46	5.54	6.14	2.60	2.09	1.47	0.92	0.71	0.85	1.81	3.72			
80	1.51	1.92	1.84	1.68	1.80	2.56	3.20	3.44	1.31	0.83	0.34	0.11	0.07	0.08	0.24	1.28			
85	0.72	0.99	0.89	0.84	0.94	1.42	1.75	1.89	0.60	0.24	0.04	0.02	0.01	0.03	0.06	0.23			
90	0.09	0.10	0.10	0.12	0.16	0.25	0.24	0.21	0.05	0.04	0.03	0.02	0.02	0.03	0.05	0.10			
95	0.05	0.06	0.04	0.04	0.04	0.04	0.04	0.08	0.05	0.04	0.03	0.02	0.02	0.04	0.06	0.12			
100	0.03	0.06	0.03	0.02	0.02	0.03	0.04	0.06	0.03	0.05	0.04	0.03	0.04	0.05	0.08	0.13			
105	0.04	0.07	0.04	0.03	0.03	0.03	0.06	0.08	0.04	0.06	0.05	0.04	0.05	0.07	0.09	0.14			
110	0.06	0.08	0.06	0.04	0.04	0.05	0.08	0.10	0.06	0.07	0.07	0.06	0.07	0.09	0.12	0.16			
115	0.08	0.09	0.07	0.06	0.05	0.07	0.10	0.13	0.08	0.09	0.08	0.08	0.08	0.11	0.14	0.18			
120	0.10	0.11	0.09	0.08	0.08	0.10	0.13	0.19	0.10	0.11	0.11	0.11	0.12	0.16	0.19	0.21			
125	0.13	0.13	0.11	0.10	0.09	0.12	0.15	0.22	0.12	0.12	0.13	0.13	0.15	0.19	0.23	0.23			
130	0.17	0.17	0.15	0.13	0.13	0.16	0.21	0.29	0.16	0.17	0.18	0.19	0.21	0.28	0.32	0.32			
135	0.22	0.21	0.18	0.17	0.17	0.20	0.26	0.36	0.20	0.22	0.24	0.26	0.29	0.38	0.42	0.43			
140	0.34	0.31	0.27	0.25	0.24	0.30	0.37	0.51	0.30	0.33	0.37	0.42	0.48	0.64	0.68	0.67			
145	0.47	0.42	0.37	0.33	0.33	0.39	0.49	0.66	0.40	0.44	0.50	0.59	0.70	0.93	0.96	0.92			
150	0.77	0.69	0.61	0.56	0.54	0.64	0.77	1.04	0.63	0.70	0.82	1.00	1.20	1.58	1.59	1.48			
155	1.08	0.98	0.89	0.82	0.79	0.91	1.08	1.42	0.87	0.96	1.13	1.39	1.69	2.18	2.18	2.00			
160	1.76	1.65	1.52	1.44	1.40	1.56	1.78	2.27	1.41	1.53	1.78	2.23	2.71	3.41	3.34	3.05			
165	2.37	2.27	2.12	2.03	1.99	2.20	2.45	3.03	1.94	2.05	2.32	2.88	3.55	4.35	4.24	3.88			
170	3.47	3.41	3.27	3.22	3.21	3.53	3.80	4.43	2.99	3.09	3.24	3.68	4.43	5.29	5.44	5.21			
175	4.20	4.16	4.06	4.11	4.18	4.60	4.79	5.45	3.79	3.88	3.97	4.22	4.66	5.49	5.98	6.13			
180	4.63	4.68	4.68	4.90	5.10	5.68	6.05	6.79	4.67	4.65	4.71	4.87	5.14	5.63	6.09	6.74			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-11-16

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks: