



[Feature]

- 25mm slender lighting surface
- 120 LM/W high light efficiency design, lumen output up to 2375 Lm/m
- Multiple light distribution options (Diffuser, Prismatic, Round grating, Asymmetric, Block frosted diffuser) to meet variety application requirements.
- Trimless recessed design.



Basic Parameters

Profile material	AL6063-T5					
Surface processing	Spraying RAL9003		☐			
	Spraying RAL9005		☒		Anodizing ☐	
CCT	2700 K 3000 K 3500 K 4000 K 5000 K 6500 K					
CRI	Ra80/Ra90					

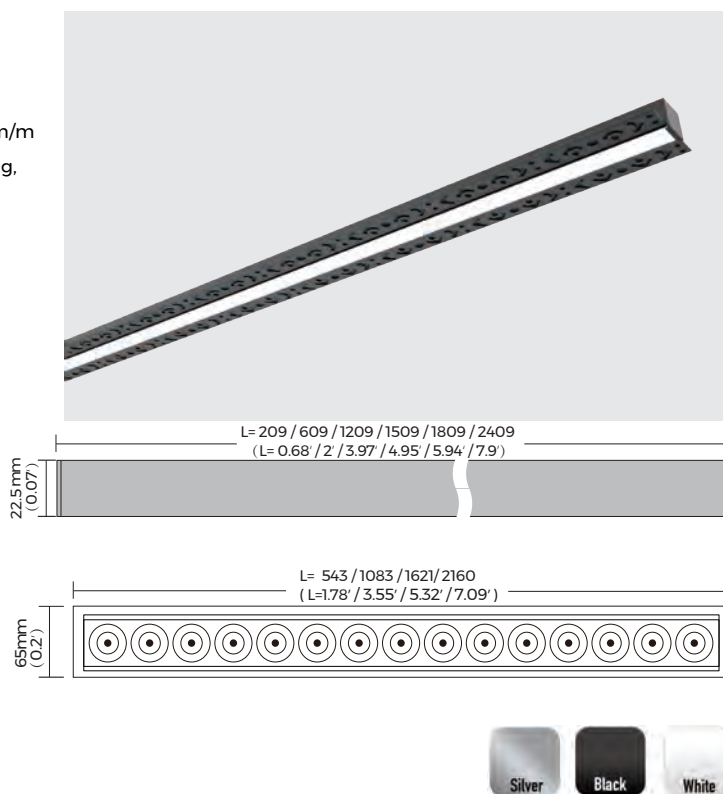

[Optical & electronic data]

		200mm (0.66')	600mm (2')	1200mm (4')	1500mm (5')	1800mm (6')	2400mm (8')	L'(277"277mm) (1"1')	T'(529"277mm) (1.7"1')	X'(529"529mm) (1.7"1.7')
Diffuser		4W/400LM	12W/1250LM	24W/2500LM	30W/3150LM	36W/3750LM	48W/5000LM	/	/	/
Prismatic		4W/400LM	12W/1250LM	24W/2500LM	30W/3150LM	36W/3750LM	48W/5000LM	/	/	/
Asymmetric		6W/710LM	12W/1425LM	24W/2850LM	30W/3560LM	36W/4275LM	48W/5700LM	/	/	/
Double asymmetric		6W/710LM	12W/1425LM	24W/2850LM	30W/3560LM	36W/4275LM	48W/5700LM	/	/	/
Bling cover		/	/	/	/	/	/	/	/	/

		200mm (0.66')	550mm (1.8')	1100mm (3.6')	1600mm (5.2')	1800mm (6')	2200mm (7.2')	L'(277"277mm) (1"1')	T'(529"277mm) (1.7"1')	X'(529"529mm) (1.7"1.7')
Round Grating 30°/55°		/	11W/850LM	22W/1700LM	33W/2550LM	/	44W/3400LM	/	/	/

Remark:

- 1, the tolerance of output data can be vary up to 10%;
- 2, the output data is typical value;