




GLT45L-PRO



FEATURES

- Compatible with 6-wire, 4-wire, and 3-wire configurations
- Operates on 220-240V input voltage
- Supports On/Off, Triac, 1-10V Knob, and DALI dimming options
- Equipped with COB LED for efficient and uniform lighting
- Designed for a 50,000-hour lifespan (L80 at 25°C)
- Adjustable with 350° rotation and 90° tilt
- Rated IP20, ideal for indoor environments

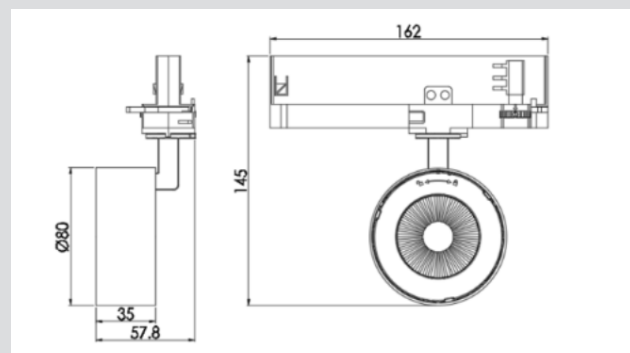


Basic Parameters

Track System	6 wire, 4 wire, 3 wire
Input Voltage	220-240V
Dimmability	On/Off, Triac, 1-10V Knob, DALI
Light source	COB LED
luminaire Lifetime	L80, 50.000H, (Ta=25°C)
Rotation Angle	350°
Tilting Angle	90°

Ordering Information

Beam Angle	Wattage	CRI	Luminous(lm)	CCT
14°	28W	90	2542 lm	4000K
			2383 lm	3000K
24°	28W	90	2497 lm	4000K
			2341 lm	3000K
36°	28W	90	2554 lm	4000K
			2394 lm	3000K
45°	28W	90	2780 lm	4000K
			2606 lm	3000K
60°	28W	90	2473 lm	4000K
			2318 lm	3000K

TECHNICAL DIAGRAMS

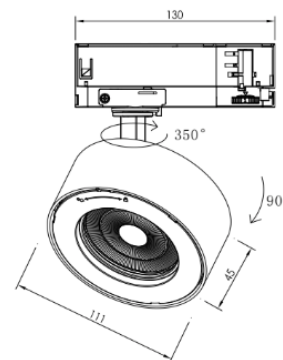

FIXTURES

