




# GLT45S-PRO



## FEATURES

- Compatible with 6-wire, 4-wire, and 3-wire configurations
- Operates on 220-240V input voltage
- Supports On/Off, Triac, 1-10V Knob, and DALI dimming options
- Equipped with COB LED for efficient and uniform lighting
- Designed for a 50,000-hour lifespan (L80 at 25°C)
- Adjustable with 350° rotation and 90° tilt
- Rated IP20, ideal for indoor environments

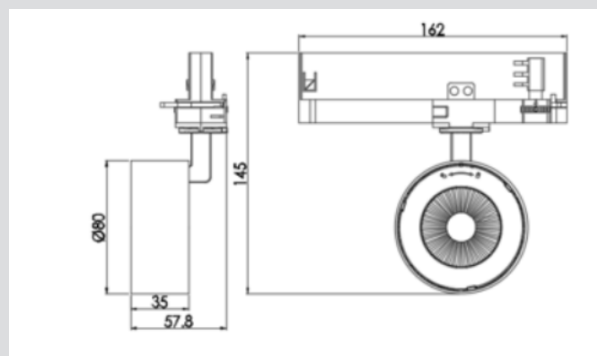


## Basic Parameters

Track System	6 wire, 4 wire, 3 wire
Input Voltage	220-240V
Dimmability	On/Off, Traic, 1-10V Knob, DALI
Light source	COB LED
luminaire Lifetime	L80, 50.000H, (Ta=25°C)
Rotation Angle	350°
Tilting Angle	90°

## Ordering Information

Beam Angle	Wattage	CRI	Luminous(lm)	CCT
14°	15W	90	1094 lm	4000K
			1000 lm	3000K
24°	15W	90	1105 lm	4000K
			1003 lm	3000K
38°	15W	90	1260 lm	4000K
			1118 lm	3000K
41°	15W	90	1180 lm	4000K
			1094 lm	3000K
64°	15W	90	1258 lm	4000K
			1149 lm	3000K

## TECHNICAL DIAGRAMS

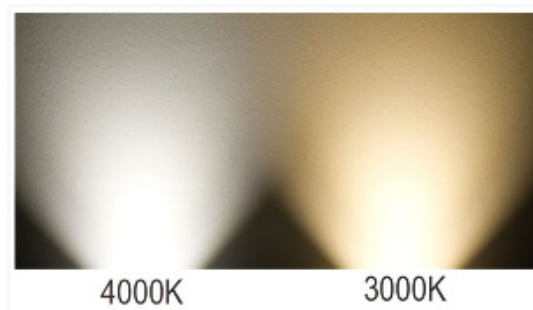

## FIXTURES

