




OPT-2075AR-11W



FEATURES

- Designed with precision optics and glare-control accessories for maximum visual comfort.
- Uses COB LED technology and high-quality reflector materials to ensure superior performance and longevity.
- Miniature, refined form with clean sightlines blends effortlessly into any space.
- Ideal for residential, commercial, and hospitality environments, delivering a sophisticated lighting experience.
- Offers 350° rotation, 30° tilt, and supports multiple dimming options: On/Off, TRIAC, 1-10V, DALI.

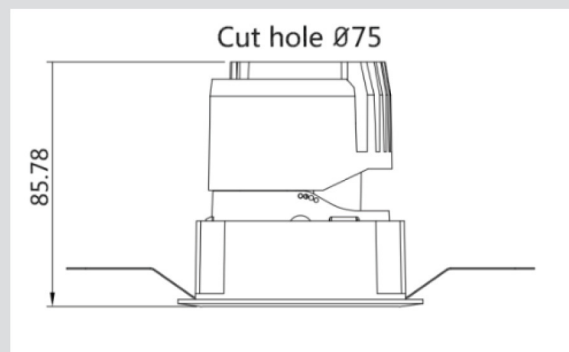

INSTALLATION INSTRUCTION



Charm Gold Bright Black Matte White Matte Black Flax Silver Blinding Black

Basic Parameters

Light source	COB LED
Input Voltage	220-240V
Dimming	On/Off, TRIAC, 1-10V, DALI
Storage temperature	-20° ~ +50°
Operating temperature	-5° ~ +30°
Rotation Angle	350°
Luminaire Lifetime	50.000h (L80-B10, Ta25°C)
Tilting Angle	30°
Material	Aluminium
Fitting Colours	9016 Sandy White/ 9017 Sandy Black

Ordering Information

Beam	Watt	CRI	Luminous	CCT
20	11W	90	819.2	4000K
			726.7	3000K
			675.8	2700K
31	11W	90	824.2	4000K
			730.6	3000K
			697.5	2700K
40	11W	90	871.8	4000K
			772.7	3000K
			718.6	2700K