




## FEATURES

- Featuring three light engine sizes, these modules can be effortlessly swapped across 20+ fitting variations, including fixed or adjustable, flat or deeply recessed, single or double configurations.
- Exceptional light quality, replicating the warm, precise illumination of halogen lamps while ensuring superior efficiency.
- Ideal for both residential and commercial spaces.

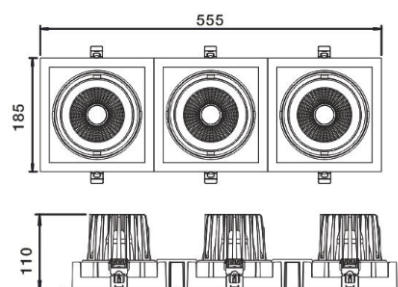

## Basic Parameters

Light source	COB
Input Voltage	AC220 ~ 240V 50/60Hz
Dimmability	Dimmable option
Storage temperature	- 30°C ~ 60°C
Operating temperature	- 20°C ~ 40°C
Current (Adjustable)	700mA
Rated life	>50,000 hours

## Ordering Information

Power	CRI	Beam Angle	Luminous	CCT
2x28w	>80	15°	4900 lm	3000K
			5205 lm	4000K
		24°	4820 lm	3000K
			5140 lm	4000K
		40°	4875 lm	3000K
			5110 lm	4000K
	>90	15°	4425 lm	3000K
		24°	4360 lm	3000K
		40°	4420 lm	3000K

## INSTALLATION INSTRUCTIONS

