



METEOR

FEATURES

Modern compact flush-mount design underwater pool light. Single-color or Multi-color light control with dimming and changing of color of lighting manually or automatically through the complete rainbow spectrum by using optional momentary switch or optional DMX512 interface LXU01 with built-in ASTEL protocol.

- Stainless-Steel Casing
- 32 Power LEDs Design
- Cool White, Warm White, RGB, RGBW
- Tempered Glass Optical Window
- High-Efficiency Lens
- Remote Control
- Microprocessor Control (network)
- Digital Dimming
- Polarity Protection
- Transient Protection
- Thermal Protection
- Low Power Consumption
- Simple Installation




SPECIFICATION

Basic Parameters

Size	Ø240 x 220 x 64 mm
Power Supply	12–24 VDC max. 10.6 A/12 VDC or 4.8 A/24 VDC
Beam Angle	31°(standard) 85°(wide) 11°(narrow)
Optical Window	Tempered glass 8 mm
Luminous Flux	max. 10.00 - 15.00 lm (cool white)
Operating Temperature	-10°C to +50°C
Light Colour (K)	cool white, warm white, blue, green, red, RGB, RGBW
Casing	Stainless-steel (316L)
IP Rating	IP68
Weight	4.3kg

Technical Diagram

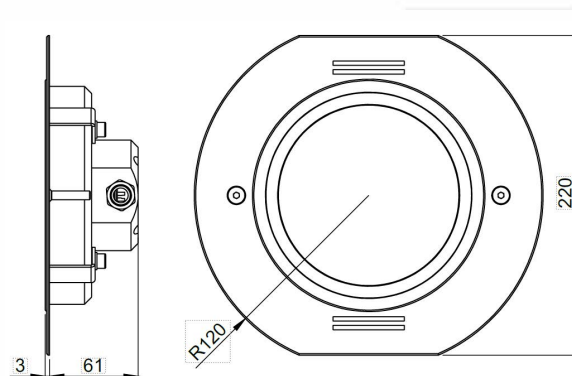

Product Ordering

CODE	COLOUR	STOCKED
METEOR-24-NW-68	warm white	S/O
METEOR-24-CW-68	cool white	S/O
METEOR-24-R-68	red	S/O
METEOR-24-G-68	green	S/O
METEOR-24-B-68	blue	S/O
METEOR-24-RGB-68	RGB	S/O
METEOR-24-RGBW-68	RGBW	S/O