




LC05-SPOTLIGHT

FEATURES

- High CRI (Ra >90, R9 >50): Ensures vivid and true color representation.
- Compact Design: Minimalist cylindrical form factor with track mounting system (85mm width).
- Beam Angle Options: Narrow 24° and wider 36° beam angles available for directional flexibility.
- Safe & Durable: Rated for indoor use (IP20), fire resistance up to 850°C, and no photobiological risk (Risk 0).
- DC24V Low Voltage: Enhances safety and energy efficiency, suitable for integrated systems and tight spaces.

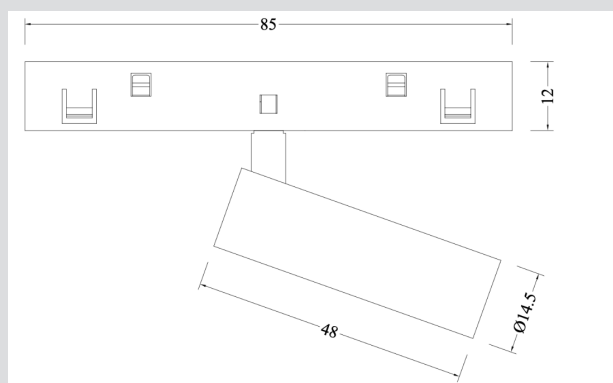

Basic Parameters

Track system	5mm
Input Voltage	DC24V
Light Source	COB LED
Power	1W-10W
IP Rating	IP20



Ordering Information

Model	Power	Voltage	CCT	Beam Angle	Product Size
LC05-SP10	1W	DC24V	3000K	24°36°	14*L55*85mm
LC05-SP20	3W	DC24V	3000K	24°36°	22*L48*85mm
LC05-SP30	5W	DC24V	3000K	24°36°	32*L60*85mm
LC05-SP40	10W	DC24V	3000K	24°36°	40*L90*85mm
LC05-SP42	10W	DC24V	3000K	24°36°	42*L90*85mm

