

 Lightcore

LIVO

Interchangability reimagined.



Design Flexibility

One design language across formats, with sleeve finishes for customization.

Performance

High lumen output, CRI 90, multiple beam angles, advanced dimming.

Applications

Ideal for luxury retail, hospitality, and modern residential spaces.

Reliability

Backed by a 5-year warranty.






The **LIVO Series** is a premium LED lighting range designed for both residential and commercial spaces. It combines sleek, modern design with high performance and energy efficiency. A key feature is its interchangeable sleeve system, allowing finishes (white, black, brass, textured, custom) to be swapped without replacing the fixture—offering style flexibility and cost savings.



CAN



RECESS

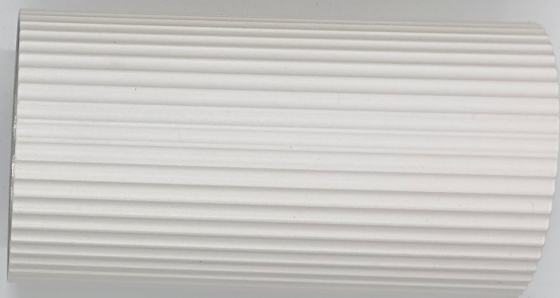


TRACK





LIVO-CAN

The **LIVO CAN** is a premium, surface-mounted ceiling luminaire designed for high-end retail and luxury interiors. Its sleek cylindrical form and refined finish deliver architectural appeal, while precision optics provide focused, glare-controlled illumination—perfect for boutiques, showrooms, and upscale spaces seeking elegant, performance-driven lighting.

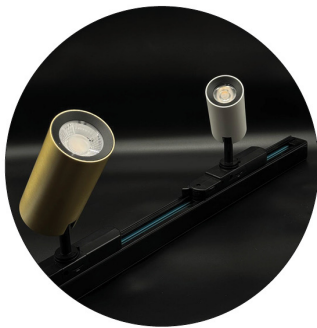

LIVO-TRACK

The **LIVO Track** is a high-performance lighting solution for luxury retail, delivering precise, efficient illumination with customizable finishes through its interchangeable sleeve system. Offering adjustable beam angles, full rotation and tilt, multiple dimming options, and CRI90 accuracy, it combines flexibility and premium performance in a cost-effective, elegant design.



LIVO-RECESS

The **LIVO Trimless Recessed** offers high-performance lighting for luxury retail, delivering seamless, precise illumination with an innovative sleeve system. Suitable for drywall and concrete ceilings, it combines versatility with a sleek, architectural design—ideal for premium spaces seeking refined aesthetics and focused illumination.

AVAILABLE FINISHES



BLACK - MATTE




BLACK - RIBBED



WHITE - MATTE



WHITE - RIBBED

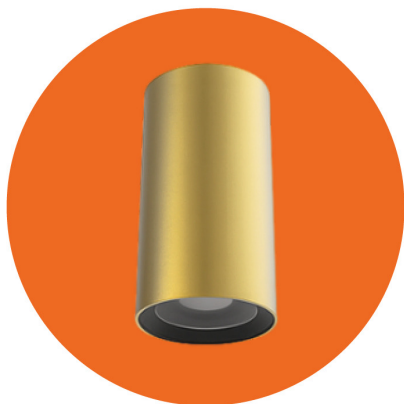

GOLD - MATTE



GOLD - RIBBED

*ADDITIONALLY, THE SLEEVES CAN BE CUSTOM COLOURED FOR LARGER PROJECT ORDERS



ALL THE ADJUSTABILITY YOU NEED





LIVO TRACK 7W


FEATURES

- Interchangeable decorative sleeve system allows customizable finishes (White, Black, Brass, Customisable).
- **Cost-effective:** users can change the look without replacing the entire fitting.
- Supports On/Of, Triac, 1-10V Knob, and DALI dimming options
- Adjustable with 350° horizontal rotation and 90° vertical tilt
- Delivers 3400 lm (3000K) or 3800 lm (4000K) output with CRI90 colour accuracy



Basic Parameters	Details
Power	7W
Track System	10mm DC48V
Material	Aluminium
Light source	COB
Operating Voltage	DC48V
Rotation Angle	350°
Tilting Angle	90°
IP Rating	IP20
System Lumen	580lm (3000K) / 640lm (4000K)
Colour Temperature	3000K / 4000K
Insulation Class	III

DIMENSIONS

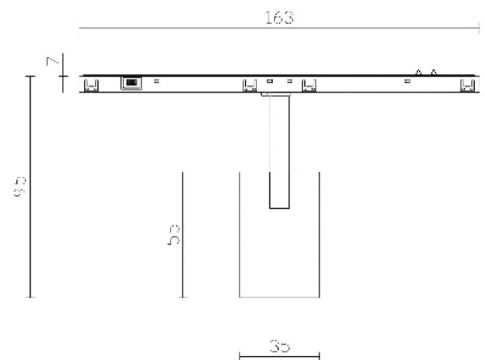

SLEEVES



Black,
Smooth



White,
Smooth



Brass,
Smooth



Black,
Textured



White,
Textured



Brass,
Textured



LIVO TRACK 15W


FEATURES

- Interchangeable decorative sleeve system allows customizable finishes (White, Black, Brass, Customisable).
- **Cost-effective:** users can change the look without replacing the entire fitting.
- Supports On/Of, Triac, 1-10V Knob, and DALI dimming options
- Adjustable with 350° horizontal rotation and 90° vertical tilt
- Delivers 3400 lm (3000K) or 3800 lm (4000K) output with CRI90 colour accuracy



Basic Parameters	Details
Power	15W
Track System	10mm DC48V
Material	Aluminium
Light source	COB
Operating Voltage	DC48V
Rotation Angle	350°
Tilting Angle	90°
IP Rating	IP20
System Lumen	1370lm (3000K) / 1500lm (4000K)
Colour Temperature	3000K / 4000K
Insulation Class	III

DIMENSIONS

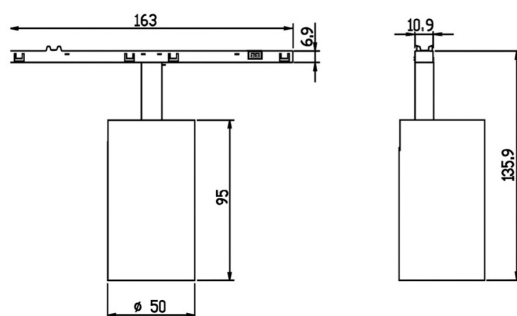

SLEEVES





LIVO TRACK 28W


FEATURES

- Interchangeable decorative sleeve system allows customizable finishes (White, Black, Brass, Customisable).
- **Cost-effective:** users can change the look without replacing the entire fitting.
- Supports On/Of, Triac, 1-10V Knob, and DALI dimming options
- Adjustable with 350° horizontal rotation and 90° vertical tilt
- Delivers 3400 lm (3000K) or 3800 lm (4000K) output with CRI90 colour accuracy



Basic Parameters	Details
Power	28W
Track System	3 Phase 4 Wires
Material	Aluminium
Light source	COB
Operating Voltage	AC220V
Rotation Angle	350°
Tilting Angle	90°
IP Rating	IP20
System Lumen	3400lm (3000K) / 3800lm (4000K)
Colour Temperature	3000K / 4000K
Insulation Class	I

DIMENSIONS

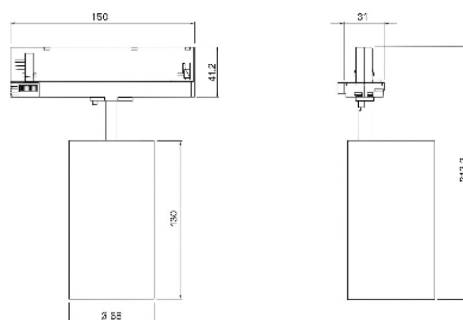

SLEEVES





LIVO CAN 10W/18W/25W


FEATURES

- **Versatility & Customisation:** With an innovative sleeve system, easily switch between finishes without needing to replace or reinstall fixtures.
- **Sleek Cylindrical Form:** Modern design that adds a sculptural element to luxury interiors/exterior.
- **Custom Finish:** Select from standard white/black/brass/textured sleeves or customise your own.
- **LIVO Family:** This series is available in track, can & trimless recess light fixtures to suit drywall & concrete ceilings.
- **Dimming:** Leading Edge / Trailing Edge / Dali dimmable.



Basic Parameters	Details
Power	10W/18W/25W
Finishing	Polyester Powder Coating
Mounting Type	Surface Mounted
Colour Temperature	3000K / 4000K
Colour Rendering	CRI90
Beam Pattern Options	24° / 36° / 50°
Body Finish	White / Black / Brass / Custom
Body Material	Aluminium
Operating Voltage	AC220V
Insulation Class	I
Ingress Protection Rating	IP20 / IP65 (Custom)
Lumen	10W: 1200lm (3000K) / 1360lm (4000k) 18W: 2160lm (3000K) / 2448lm (4000k) 25W: 3000lm (3000K) / 3400lm (4000k)
Warranty	5 years
Size	10W: 45mm*94mm 18W/25W: 68mm*130mm/132mm
Dimming	Trailing / Leading Edge / DALI

DIMENSIONS

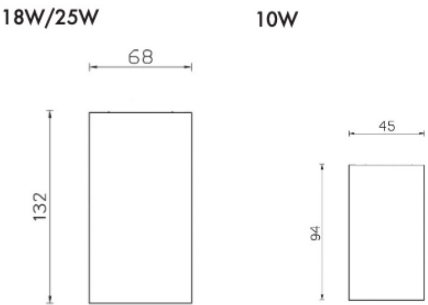

SLEEVES

*Custom colours available





LIVO CAN - TRIMLESS RECESSED

FEATURES

- **Versatility** - Trimless recessed lighting that is suitable for drywall and concrete ceilings.
- **LIVO Family** - Available to match with LIVO Can and Track Lighting for seamless aesthetics and lighting effects.
- Integrated driver included
- **Dimming** - Trailing Edge / Leading Edge / DALI
- **Sleek and Stylistic Design** - LIVO's architectural appeal makes it ideal for luxury spaces requiring refined and focused illumination




Basic Parameters	Details
Power	18W/25W
Finishing	Polyester Powder Coating
Mounting Type	Surface Mounted
Colour Temperature	3000K / 4000K
Colour Rendering	CRI90
Beam Pattern Options	24° / 36° / 50°
Body Material	Aluminium
Operating Voltage	AC220V
Insulation Class	I
Ingress Protection Rating	IP20 / IP65 (Custom)
Lumen	18W: 2160lm (3000K) / 2448lm (4000k) 25W: 3000lm (3000K) / 3400lm (4000k)
Warranty	5 years
Size	Concrete: 68mm*139mm Drywall: 66.2mm*129.5mm
Dimming	Trailing / Leading Edge / DALI

DIMENSIONS

Concrete

Drywall

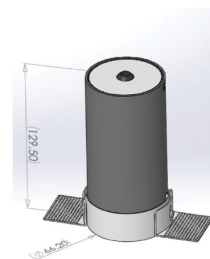

BAFFLE FINISHES



BLACK,
SMOOTH



WHITE,
SMOOTH



BRASS,
SMOOTH

LIVO

Intechangable sleeve track system by  Lightcore

CONTACT US:

E: hello@lightcore.com.au

T: 1300652719

W: www.lightcore.com.au

SOCIALS: [@lightcore_lighting](https://www.instagram.com/lightcore_lighting)

