




ALIGN 10080



FEATURES


- Versatile commercial lighting system that combines custom design with high-performance LED and optic technology
- Custom diameters, radii, and lengths to turn custom lighting concepts into reality.
- Maintains light uniformity and aesthetic across standard straight and custom feature areas.
- Available with integrated DALI
- Supplied custom made for plug and play installation

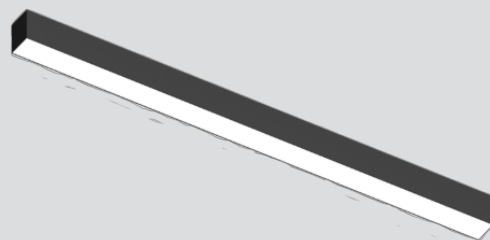

Basic Parameters	Details
Size	100mm x 80mm
Input Voltage	DC24V
Luminous Efficiency	100lm/W
Max Power	35W/m
Lifetime	L80 B10 or 72,000h
Colour / CCT	2700K, 3000K, 4000K, 6000K and 6500K
Driver	Internal or External
IP Rating	IP44
CRI	8: >80, 9: >90
Finish	Aluminium / Black / White / Custom
Control	Option of DALI 2 / Trailing Edge / Non-dimmable
Mounting	Surface Mount or Suspension

Product Ordering			
CODE	COLOUR	FINISH	STOCK
AL10080-ALU	CCT(K)	ALU	YES
AL10080-B	CCT(K)	BLACK	YES
AL10080-W	CCT(K)	WHITE	YES

DIAGRAMS

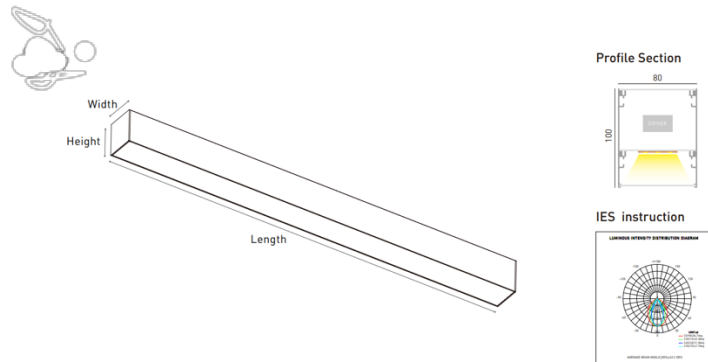

INSTALLATION

