




ALIGN-4040

FEATURES

- Suspended or surface mount installation options
- Remote driver for clean integration and easy maintenance
- 5-year warranty for assured performance and reliability
- LED circle light with smooth, uniform downlight effect
- Effortless ring glow with dot-free illumination
- Ideal for car showrooms, garages, and office spaces

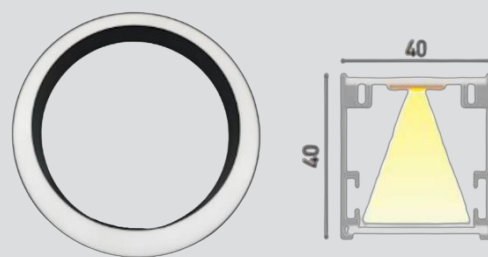

Basic Parameters	Details
PROFILE SIZE	W40*H40mm
PRODUCT SIZE	D4540mm
POWER	20W/M, 285W
CERTIFICATION	SAA
MATERIAL	Aluminum Profile + PC Diffuser
IP	IP40
COLOUR	Powder Coated, Matte Black
EFFICIENCY	100lm/W
LUMEN OUTPUT	28500lm
VOLTAGE	220-240V
CRI	Ra90
CCT	3000K
DRIVER	DALI Dimming, BOKE, External

Product Ordering	
SUSPENDED + SM	ALIGN-4040-S
SURFACE-MOUNT	ALIGN-4040-SM

INSTALLATION



ALIGN-4040-S: Suspended + Surface Mounting

Power Cable: L = 2.0m, black.
Suspended Cable: L = 2.0m, black
Surface Mounting Screws



ALIGN-4040-SM: Surface Mounting

Power Cable: L = 0.5m, black.
Surface Mounting Screws