



LC25R-SLIMLINE

FEATURES


- 25mm slender lighting surface
- 120 LM/W high light efficiency design, lumen output up to 2375 Lm/m
- Multiple light distribution options (Diffuser, Prismatic, Round grating, Asymmetric, Block frosted diffuser) to meet variety application requirements.
- Trimless recessed design.



Basic Parameters	Details
Profile material	AL6063-T5
Colour / CCT	2700K, 3000K, 3500K, 4000K, 5000K, 6500K
CRI	Ra80/Ra90
Finish	Silver / Black / White / Custom
Mounting	Recessed

Optical and electronic data						
	200mm	600mm	1200mm	1500mm	1800mm	2400mm
Diffuser/ Prismatic	4W	12W	24W	30W	36W	48W
	400lm	1250lm	2500lm	3150lm	3750lm	5000lm
Asymmetric	4W	12W	24W	30W	36W	48W
	710lm	1425lm	2850lm	3560lm	4275lm	5700lm
Double Asymmetric	4W	12W	24W	30W	36W	48W
	710lm	1425lm	2850lm	3560lm	4275lm	5700lm

DIAGRAMS

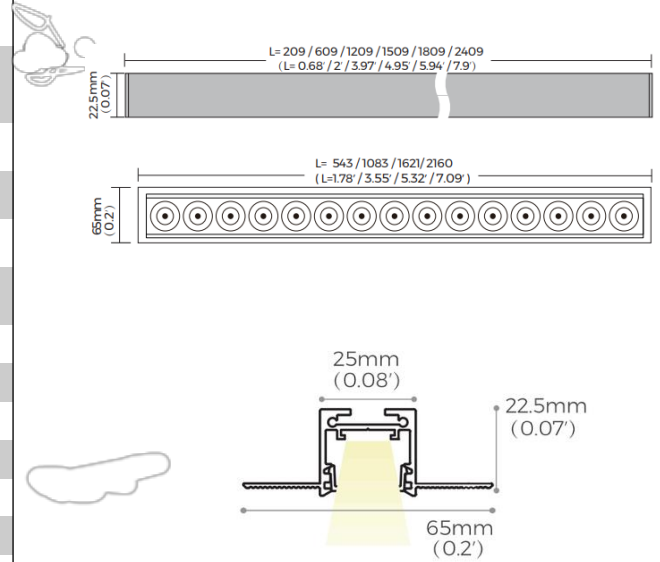

Product Ordering			
CODE	COLOUR	FINISH	STOCK
SLIMLINE-S	CCT(K)	ALU	YES
SLIMLINE-B	CCT(K)	BLACK	YES
SLIMLINE-W	CCT(K)	WHITE	YES