


# LED PIXEL SHEET




## FEATURES

- Customisable flexible LED panel for versatile lighting applications
- Easily cut along the scissors mark for precise sizing and installation
- Ideal for large luminous surfaces like light boxes, feature walls, and bar counters
- Provides uniform, dot-free illumination
- Backed by a 5-year warranty and 50,000+ hour lifespan

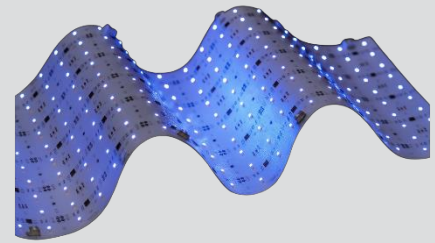

Basic Parameters	Details
Input Voltage	DC24V
Power	92 W/pcs
RA/Wave(R)	620-630mm
RA/Wave (G)	505-515mm
RA/Wave (B)	460-470mm
RA/Wave (W)	(2700K-6500K) > 90
Color Temperature	RGBW (2700K-6500K)
Working Temp.	-20 deg to 60 deg.
Storage Temp	-25 deg. to 60 deg.
Cut Length	40*48mm
PCB Size	480*240mm
PIX	50 PIX/PCS

## TECHNICAL DIAGRAMS

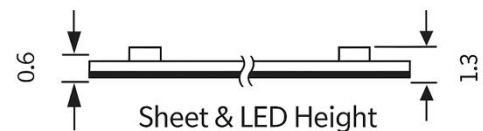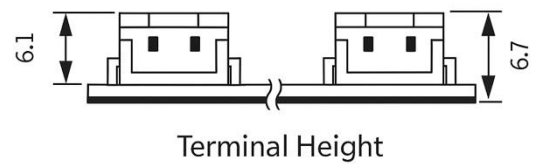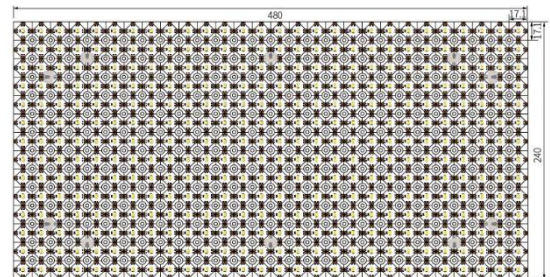

Product Ordering			
Code	Kelvin	LM/M	Stocked
LC-LED-SH-PIXEL	RGBW (CCT)	800	S/O