





# GLOPRO SAUNA 0612



## FEATURES


- Made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high transparency and high strength
- Environmental protection grade silicone material, integrated extrusion moulding process
- Unique optical light distribution structure design, uniform lighting surface and no shadow
- IP44/IP67 protection level, salt solution resistance, acids & alkali and UV resistance
- Dust-free matte finish, Using Lumileds LEDs, the SDCM of finished product can be minimized to 3 steps

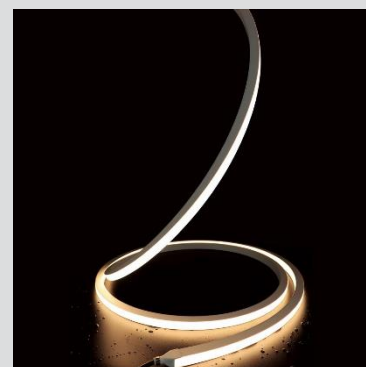

Basic Parameters	Details
Size	6 x 12mm x 10000mm (or custom)
Continuous Max Run	10 metres
IP Rating IP65	>IP67
Finish (F)	White (W), Black (B)
Input Voltage	DC24V
Typical power	10W/1m
CCT	2700K, 3000K, 4000K, 65000K, CCT, RGB+CCT
CRI	>90
Beam Angle	60°, 90°, 170°
Warranty	5 years or 30,000 hours
Energy Efficiency Class	A+
Control	Phase-cut leading & trailing / 0-10V / 1-10V / PWM / DMX / DALI

Product Ordering			
CODE	COLOUR	LM/M	STOCK
GLOPRO-24-0612-2700-67-W	2700K	428	S/O
GLOPRO-24-0612-3000-67-W	3000K	430	S/O
GLOPRO-24-0612-4000-67-W	4000K	431	S/O

## DIAGRAMS

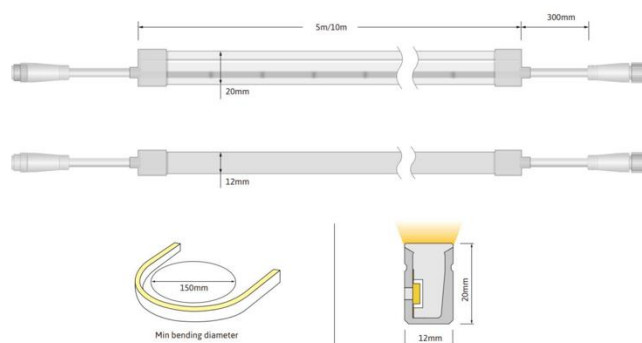

## ACCESSORIES

**GLOPRO-24-SAUNA-0612A-1000**  
Aluminium profile  
1000(±5)x8x13mm(L x W x H)



**GLOPRO-24-SAUNA-0612A-15**  
Aluminium mounting clips  
15x8x13mm(L x W x H)



**GLOPRO-24-SAUNA-0612SS-15**  
Stainless steel mounting clips  
15x7.2x12.8mm(L x W x H)

