



# HIGH BAY-Smart



## FEATURES


- Smart Bluetooth Control: Easily manage individual or group lighting through the Tuya App on your smartphone
- Adjustable Brightness & CCT: Smooth 0–100% dimming with simultaneous tunable colour temperature from 3000K to 5000K via patented double-output driver technology.
- High-Performance Output: Designed for large commercial and industrial spaces, delivering powerful, uniform illumination with multiple beam angle options.
- Durable Industrial Design: IP65-rated construction protects against dust and water, suitable for demanding indoor and outdoor environments.



Basic Parameters	Details
Power Consumption(±5%)	0-200W Adjustable
Input Voltage	100-240 Vac, 50 / 60 Hz
Luminous Flux (±10%)	28000LM-3000K 33000LM-4000K 30000LM-5000K
Efficacy(4000K Ra70)	140 LM/W-3000K 165 LM/W-4000K 150LM/W-5000K
CCT & CRI	3000K-5000K Adjustable(Other CCT ranges optional)
Beam Angle	H00108 / H00111 / H00115 / H00121
Protection Rating	IP65, IK08
Product Dimension	Φ365×178mm
Luminaire Net Weight	3.4±0.3 kg

Product Ordering	
CODE	HB44-200/Ty

## PHOTOMETRIC DIAGRAMS

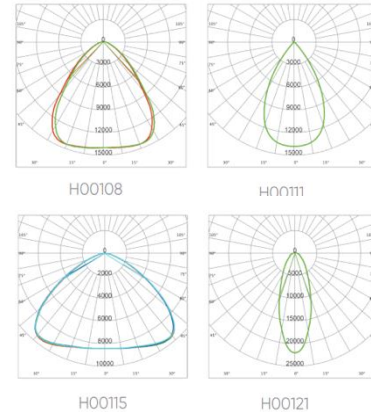

## MOUNTING OPTIONS

