



# LUXE




## FEATURES

- Unique design with a reflector and a high-power LED chip.
- Utilizes ADC12 Aluminium profile for effective thermal dissipation.
- Suitable for various ceiling installations.
- Up to 70% energy saving compared to standard CFL.
- Achieves excellent dimming compatibility with dimmers from renowned worldwide brands.




Basic Parameters	Details
Dimension	Ø100*90.5mm
Input Voltage	AC230V
Power	12W
Power Factor	≥0.9
Lumens (lm)	910
Beam Angle	60°
CCT	3000K, 4000K
Lifespan	40000hrs
CRI	≥80


## DIMENSIONS

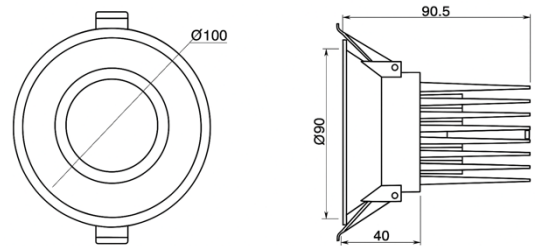


## INSTALLATION INSTRUCTIONS




1. Open a hole according to the cutout size of led downlight.



2. Use screw-driver to open the driver terminal cover, feed the main AC wire L, N, in terminal block respectively, then fit the cover back.



3. Connect the downlight with driver, hold back the spring clip then push the downlight into the hole.



4. Make sure the downlight fixed tightly in ceiling, turn on the power.

Product Ordering			
CODE	COLOUR	FNISH	STOCK
LUXE-10-3000-W	3000K	WHITE	YES
LUXE-10-4000-W	4000K	WHITE	YES
LUXE-10-3000-B	3000K	BLACK	YES
LUXE-10-4000-W	4000K	BLACK	YES