




NERO-16




FEATURES

- Unique optical light distribution structure design, 360° emitting uniform without shadow.
- P65 protection level with integrated extrusion moulding process, high light transmittance, environment-friendly silicone material.
- Excellent toughness, stylish appearance, elegant design
- Salt resistance, acid & alkali corrosion resistance, UV and fire resistance.
- Ambient temperature: -25°C – 60°C; Storage temperature: 0°C – 60°C.

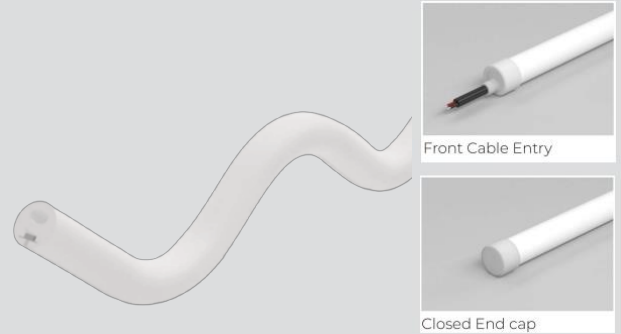

Basic Parameters	Details
Size	16mm (W) x 15.5mm (H)
Input Voltage	DC24V
Power	10W/m
Lumen (per/m)	660 / 650 / 700 730 / 730 / 350
Efficiency (lumen per/w)	66.0 / 65.0 / 70.0 73.0 / 73.0 / 35.0
Colour / CCT	2700K, 3000K, 4000K, 6500K, CCT, RGB
IP Rating	IP67
CRI	>90
Finish	White
Led Pin Temperature	Max 65°C
Storage temperature	-25°C to 60°C
Ambient temperature	-25°C to 45°C
Energy Efficiency Class	>A+


DIAGRAMS

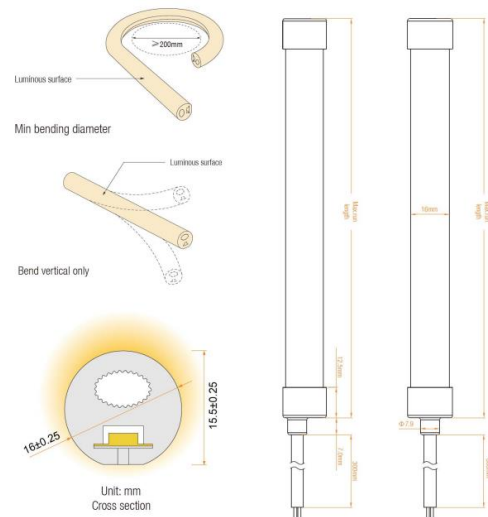

Product Ordering			
CODE	COLOUR	LM/M	STOCK
GLOPRO-24-DOME-16-2700-67	2700K	660	YES
GLOPRO-24-DOME-16-3000-67	3000K	650	YES
GLOPRO-24-DOME-16-4000-67	4000K	700	YES
GLOPRO-24-DOME-16-6500-67	6500K	730	YES
GLOPRO-24-DOME-16-CCT-67	RGB	730	S/O
GLOPRO-24-DOME-16-RGB-67	RGB+CCT	350	S/O

RECOMMENDED ACCESSORIES

GLOPRO-24-DOME-16P-1000
PC Transparent profile
1000(±5) x 16.6 x 15.3mm
(L x W x H)



GLOPRO-24-DOME-16P-20
PC Transparent clip
20 x 16.6 x 15.3mm
(L x W x H)

